




SLR [®] Since 1965
RIGGING

RIGGING HARDWARES

EYE GRAB HOOK

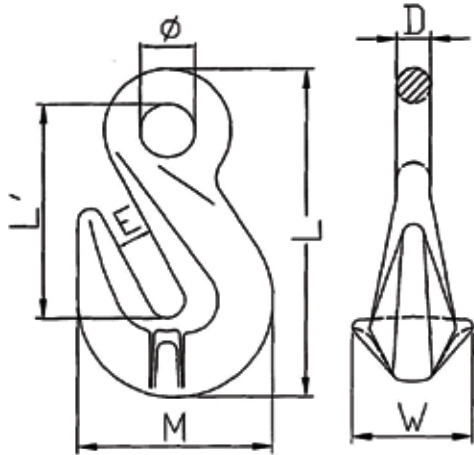

TECHNICAL PARAMETERS

Product Code	WLL (Ton)	B.L. (Ton)	E (mm)	Ø (mm)	L' (mm)	L (mm)	M (mm)	W (mm)	D (mm)
8-SLR085-6	1.12	4.48	8±0.5	14.5±1	47±1.5	73±2	45.5±1	21.5±1	8±0.5
8-SLR085-7/8	2	8	11±0.5	17.5±1	61.5±1.5	93±2	53±1	30.5±1	9.5±0.5
8-SLR085-10	3.15	12.6	13±0.5	20.5±1	80±1.5	122±3	71±1	46±1	13±0.5
8-SLR085-13	5.3	21.2	16.5±1	26±1	99.7±2	158±3	96±1	57.5±2	15.5±1
8-SLR085-16	8	32	19±1	30.5±1.5	106.5±2	169±3	113±2	72±2	19±1
8-SLR085-20	12.5	50	24±1.5	37.5±1.5	140±2	219±3	143±2	74±2	23±1.5
8-SLR085-22	15	60	28±1.5	44±2	165±2	259±4	160±2	90±2	26±1.5
8-SLR085-26	21.2	84.8	30±1.5	49±2	197±2	306±4	181±2	110±2	34±2
8-SLR085-32	31.5	126	41±1.5	64±2	246±2.5	373±4	229±2.5	130±3	40±2

Higher sizes are available on request. Due to continual development of products, manufacturer reserve the right to modify design, dimensional parameters and component material without prior notice