




## WEBBING SLING HOOK

### TECHNICAL PARAMETERS

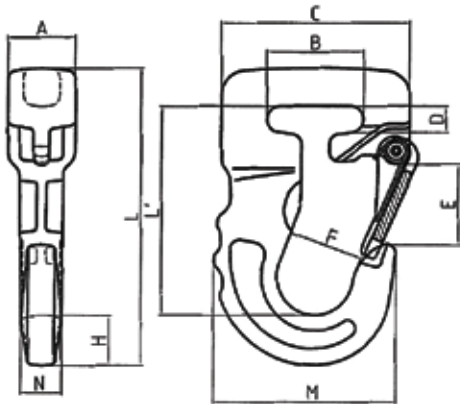

Product Code	WLL(T)	B.L.(T)	A (mm)	B (mm)	C (mm)	D (mm)	M (mm)	E (mm)	F (mm)	L (mm)	L' (mm)	H (mm)	N (mm)
10-SLR1055-1T	1	4	28±1	40±1	78±1.5	11±0.5	75.7±2	32±1.5	31±1.5	124±3	87±3	21±1	17±1
10-SLR1055-2T	2	8	35±1	44.5±1	91±1.5	12.5±0.5	90±2	40±1.5	39±1.5	148±3	103±3	27±1	21±1
10-SLR1055-3T	3	12	45±1	54±1	113±2	15.5±0.5	110±3	40±1.5	47±1.5	175±3	115±3	33±1	26±1
10-SLR1055-4T	4	16	56±1.5	76.5±1.5	133±2	21±1	139±3	50±2	60±2	223±4	147±4	40.5±1.5	32±1.5
10-SLR1055-5T	5	20	56±1.5	76.5±1.5	133±2	21±1	139±3	50±2	60±2	223±4	147±4	40.5±1.5	32±1.5
10-SLR1055-6T	6	24	56±1.5	76.5±1.5	133±2	21±1	139±3	50±2	60±2	223±4	147±4	40.5±1.5	32±1.5

Higher sizes are available on request. Due to continual development of products, manufacturer reserves the right to modify design, dimensional parameters and component material without prior notice.