




MANUAL CHAIN PULLEY - LIFTMASTER

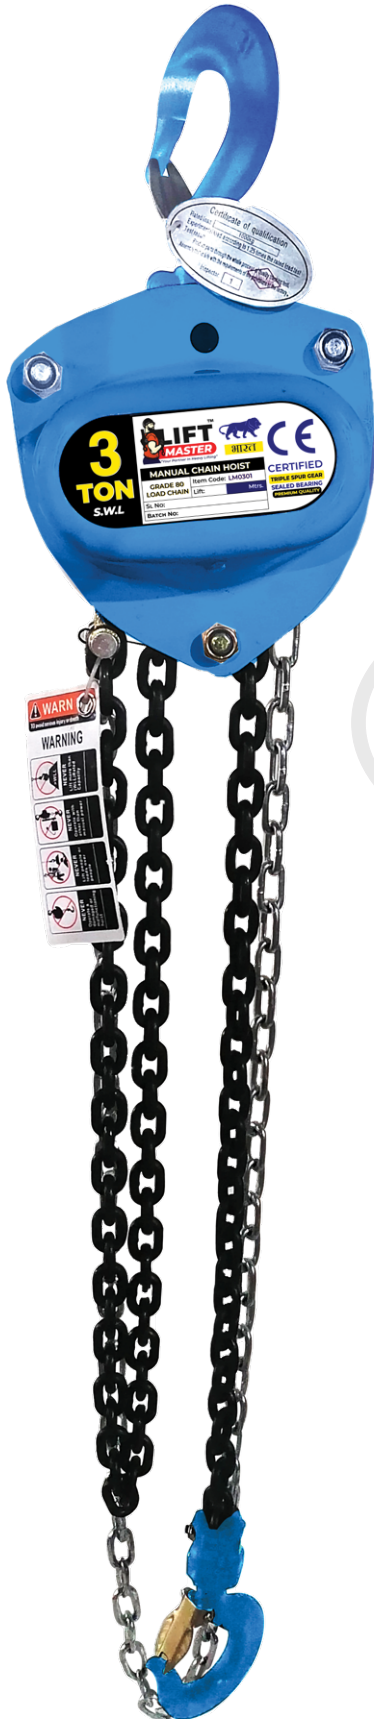

CAPACITY: 1 TO 50 TONNES

- Light Weight & Easy To Carry
- Forged Alloy Steel Hook
- Long Life Friction Friction P Plate
- Asbestos Free Mechanical Brake
- Two Coats Application Based Paint
- Low Headroom
- Cost Efficient & Economical
- Heat Treated Alloy Steel Hook
- Heat Treated Load Chain Wheel
- Heat Treated Alloy Steel Load Chain
- Tested for 50% overload at works

TECHNICAL PARAMETERS

Product Code	KE010103-PRO	KE020103-PRO	KE020203-PRO	KE030103-PRO	KE030203-PRO	KE050203-PRO	KE100403-PRO	KE200803-PRO	KE301203-PRO	KE502203-PRO	
Capacity (Tonnes)	1	2	2	3	3	5	10	20	30	50	
Standard Lift (Mtr)	3	3	3	3	3	3	3	3	3	3	
Number Of Falls	1	1	2	1	2	2	4	8	12	22	
Effort Required at Capacity (N)	250	335	330	363	370	360	380	435*2	435*2	435*2	
Test Load (Tonnes)	1.5	3	3	4.5	4.5	7.5	15	30	37.5	50	
Load Chain Dia (Mm)	6	8	6	10	8	10	10	10	10	10	
Net Weight (Kg)	12.5	19.5	12	29	24	41.3	78.5	193	220	1092	
Dimension (mm)	A	151	175	151	176	151	189	189	192	330	410
	B	172	210	159	230	208	280	463	630	670	900
	C	32	36	32	46	46	46	57	82	106	130
	H	376	470	315	565	475	688	765	890	1000	1950

Extra Lift & higher sizes are available on request. Due to continual development of products, manufacturer reserves the right to modify design, dimensional parameters and component and composition of material without prior notice

