




SELF LOCK EYE HOOK

TECHNICAL PARAMETERS

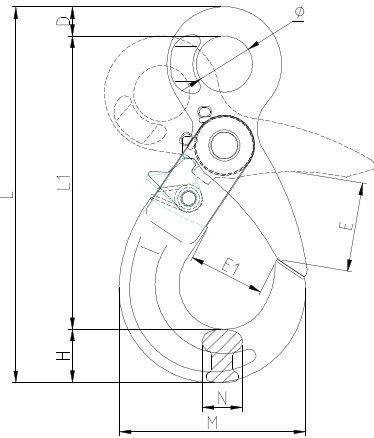

Product Code	WLL (Ton)	B.L. (Ton)	(mm)	E (mm)	E1 (mm)	L1 (mm)	L (mm)	H (mm)	D (mm)	N (mm)	M (mm)	Weight (Kg)
8-SLR-737-06	1.12	4.48	21±1	32±2	28±1	110±3	140±3	20±1	11±0.5	15±0.5	73±2	0.5
8-SLR-737-7/8	2	8	25±1	40±3	35±1	136±3	175±3	26±1	13±0.5	20±0.5	91±2	0.83
8-SLR-737-10	3.15	12.6	34.5±1.5	48±1.3	45±1.5	168±3	213±3	30±1.5	15±0.5	26±1	108±2	1.42
8-SLR-737-13	5.3	21.2	39.5±1.5	27±3	52.5±2	207±4	267±4	40±1.5	21±0.5	33±1	142±3	2.86
8-SLR-737-16	8	32	50±2	65±3	63±2	254±4	332±4	50.5±2	27±0.5	38±2	168.6±3	5.9
8-SLR-737-20	12.5	50	64.5±2	82±3.5	82±2	278±5	360±5	55±2	27±0.5	50±2	185±4	8.5
8-SLR-737-22	15	60	70±3	80±3.5	76±2	319±5	415±5	67±2	32±1	52±2	202±4	11.6
8-SLR-737-26	21.2	84.8	80±3	109±3.5	96±3	362±6	472±5	75±3	34±1	60±3	239±5	18
8-SLR-737-32	31.5	126	105±4	131±3.5	131±3	470±6	614±5	97±3	45±1	79.5±3	329±5	46

Higher sizes are available on request. Due to continuous development of products, manufacturer reserves the right to modify design, dimensional parameters and component material without prior notice.